


ESP Cable Solutions Co.,Ltd

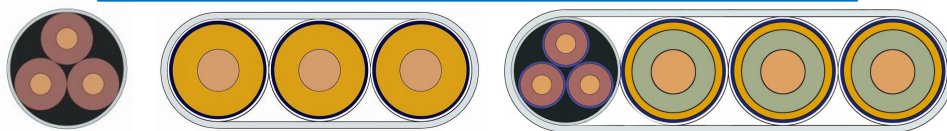

TEC SPECIFICATION

Type: 1/4" 0.028" WT A825 T-01 Insulation 16AWG Stranded, Tin Coated, Encapsulated
16AWG TEC 16,000 PSI SYSTEM
INSULATION: T-01 INSULATION
JACKET: P-06 MATERIAL
TUBE: 1/4" x 0.028" A825 STAINLESS STEEL TUBE
ENCAPSULATION: MODIFIED POLYPROPYLENE, 11MM SQUARE
OUTER COLOR: YELLOW

A.	16#AWG 7×0.487mm Tinned Stranded Copper Conductor: OD 1.47mm Nominal
B.	FEP, T-01 INSULATION: OD 2.60mm Nominal, Natural
C.	PP, P-06 JACKET: OD 4.92mm Nominal, Red
D.	A825 STAINLESS STEEL TUBE: WALL THICKNESS: 0.71mm(0.028"), OD 6.35mm(0.250") Nominal
E.	POLYPROPYLENE ENCAPSULATION: 11mm*11mm

PHYSICAL CHARACTERISTICS	DATA VALUES	
EXTERNAL COLLAPSE PRESSURE		psi
RATED WORKING PRESSURE		psi
TENSILE STRENGTH MIN.		KN
CABLE WEIGHT	223	kg/km
TEMPERATURE RATING	150	°C

ELECTRICAL CHARACTERISTICS	DATA VALUES	
CENTER COND. DC RESISTANCE AT 20°C		ohms/km
STAINLESS TUBE DC RESISTANCE AT 20°C		ohms/km
VOLTAGE RATING DC		VRMS
CAPACITANCE CERTER COND. TO TUBE		pf/m
INSULATION RESISTANCE AT 20°C CENTER CONDUCTOR TO TUBE		megohm-km

